

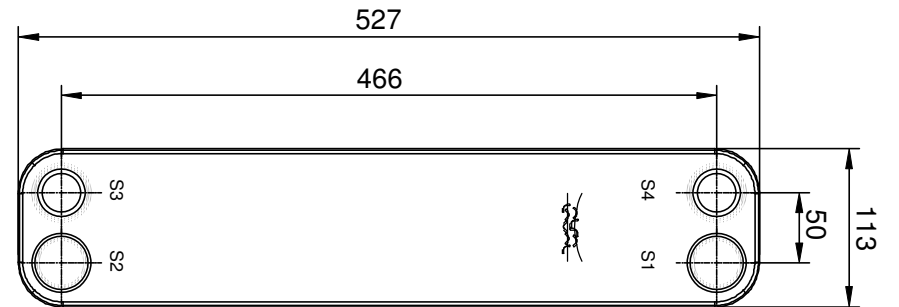
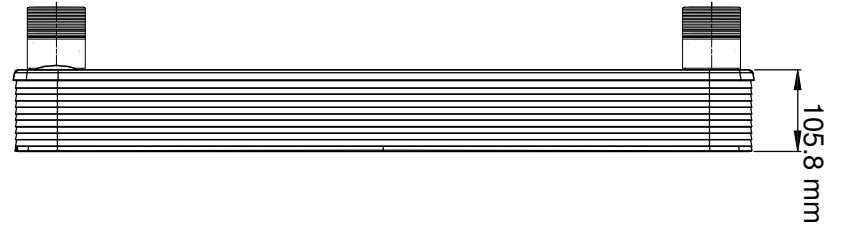



Note that all unique customer requirements (i.e tolerance) need to be verified thru Alfa Laval.



Frameplate is depressed 2.1 mm at connections S3 and S4 if holed.
Pressureplate is depressed 2.1 mm at connections T3 and T4 if holed.

T1 T2 T3 T4 locations on back side correspond to S1 S2 S3 S4 on front side

ALL DIMENSIONS IN MILLIMETERS

HEATING SURFACE	2.204 m ²	PLATE MATERIAL	Alloy 316	TOTAL LENGTH	150.8
NETWEIGHT	10.31 kg			TOTAL WIDTH	113.0
OPERATING WEIGHT	14.23 kg	PLATE GROUPING	1*19L / 1*20L	TOTAL HEIGHT	527.0


SUPPLIER	REF.	MP NO.
AGENT/REF.		
CUSTOMER NAME / REF. NO.		
SIGN.		

PLATE HEAT EXCHANGER

CB60-40L

PED

ITEM ID.	32871 0148 8
DATE	2016-11-04
REV	0



MEDIA	INLET	TEMP.	OUTLET	TEMP.	FLOW RATE	PRESSURE DROP	LIQUID VOL.
Water	S4	115.0 °C	S3	52.0 °C	2.4 m ³ /h	3.238 kPa	1.957 dm ³
Water	S2	50.0 °C	S1	70.0 °C	7.4 m ³ /h	21.05 kPa	2.060 dm ³